



## Data sheet | Item number: 756-3205/140-150

Connecting cable; for the connection of M8 sensor/actuator boxes; 14-pole;  
M16 socket, straight; one free cable end; 15 m

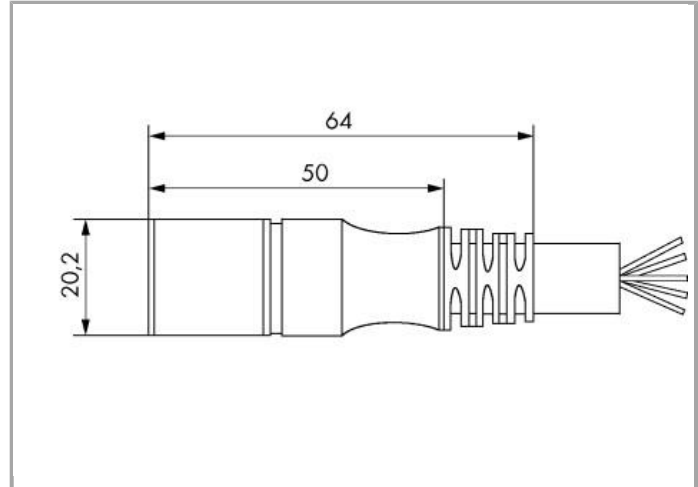

[www.wago.com/756-3205\\_140-150](http://www.wago.com/756-3205_140-150)

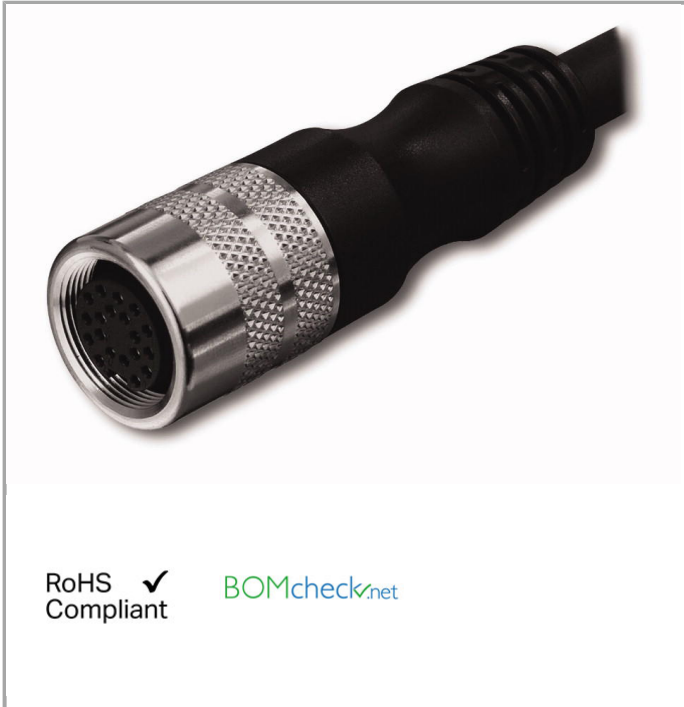

RoHS  Compliant [BOMcheck.net](https://www.bomcheck.net)

Pin A, L: 0.75 mm<sup>2</sup>  
Pin C - J, N - T: 0.34 mm<sup>2</sup>

A	brown	N	pink-brown
C	white-pink	O	violet
E	black	P	white
G	pink	R	red
J	green	S	gray
L	blue	T	yellow
M	commoned with A	U	commoned with L

### Data

#### Technical Data

Connection type	M16 socket - free end
No. of poles	14
Leitungsanschlussrichtung zur Steckrichtung	0°
Cable length	15 m
Operating voltage	150 V
Operating current	4 A



Operating current	6 A (0,75 mm <sup>2</sup> )
Rated surge voltage	1,2 kV

### Mechanical data

Bending cycles	2
Schleppkettentauglichkeit	yes
Durchmesser der Mantelleitung	8.9 ... 9.3 mm
Weight	1753 g

### Environmental Requirements

Umgebungstemperatur (Betrieb) bewegt	-30 ... +90 °C
Umgebungstemperatur (Betrieb) ruhend	-40 ... +90 °C
Degree of protection	IP67

### Commercial data

Country of origin	DE
GTIN	4044918978521

### Downloads

#### Documentation

#### System Description

Sensor/Actuator Boxes – General Product Information	Jun 6, 2017	357.7 kB	Download
-----------------------------------------------------	-------------	----------	----------

Subject to changes.