


Data sheet | Item number: 286-662

Current flow monitoring module; DC current flow monitoring module; 0.4 A ...
3.5 A; Relay with 1 make contact (1a)




www.wago.com/286-662

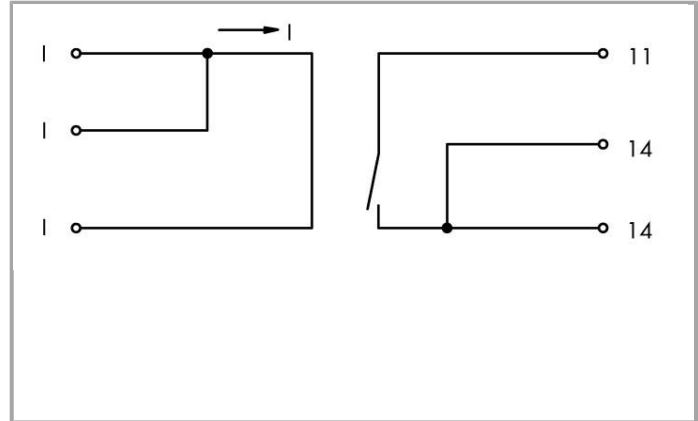

RoHS Compliant

BOMcheck.net

Color: ■

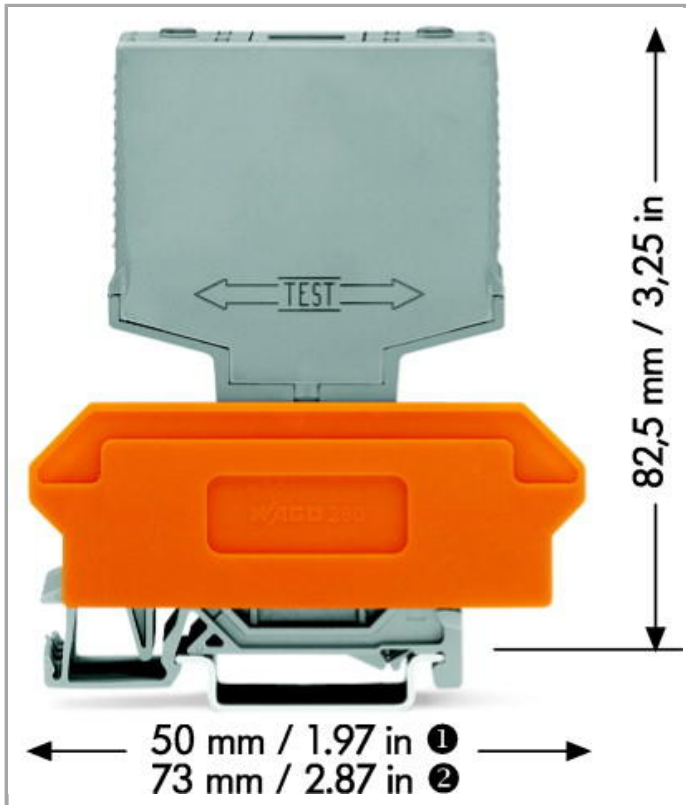

Data

Technical Data

General specifications

Operating voltage	12 ... 28 VDC
Limiting continuous current	0.5 A
Max. measuring span	0.4 A ... 3.5 A DC (-20 ... +40 °C); 0.4 A ... 3 A DC (-20 ... +60 °C); 0.4 A ... 2 A DC (-20 ... +70 °C)
Turn on / off point	0.35 A / 0.07 A
Switching voltage (max.) DC	200 V
Switching power	10 W
Voltage drop at input	24 ... 210 mV
Response time	0.5ms

Safety and protection:

Dielectric strength input / output	1.5 kV
------------------------------------	--------

Mechanical data

Type of mounting	Pluggable module for carrier terminal blocks
------------------	--

Material Data

Color	light gray
Weight	22.7 g

Environmental Requirements




Surrounding air (operating) temperature	-25 ... 40 °C
---	---------------

Commercial data







Country of origin	DE
GTIN	4045454415730
Product Group	6 (Interface Electronics)

Compatible products

General accessories

	Item no.: 280-609 Terminal block for pluggable modules; 12-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ²	www.wago.com/280-609
	Item no.: 280-619 Terminal block for pluggable modules; 6-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ²	www.wago.com/280-619
	Item no.: 280-763 Terminal block for pluggable modules; 12-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ²	www.wago.com/280-763

Marking accessories

	Item no.: 209-701 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701
	Item no.: 209-701/000-002 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-002
	Item no.: 209-701/000-005 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-005
	Item no.: 209-701/000-006 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-006
	Item no.: 209-701/000-007 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-007
	Item no.: 209-701/000-012 WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-012



Item no.: 209-701/000-017
WSB marking card; as card; not stretchable; plain; snap-on type

www.wago.com/209-701/000-017



Item no.: 209-701/000-023
WSB marking card; as card; not stretchable; plain; snap-on type

www.wago.com/209-701/000-023



Item no.: 209-701/000-024
WSB marking card; as card; not stretchable; plain; snap-on type

www.wago.com/209-701/000-024

Downloads

Documentation

Bid Text

286-662	Jan 15, 2016	DOC	Download
Interface-Bausteine mit Sonderfunktionen		24.6 kB	

Additional Information

Disposal; Electrical and electronic equipment, Packaging	Oct 15, 2018		Download
		265.8 kB	

Subject to changes.

WAGO Corporation
Germantown, WI 53022
32423 Minden
Phone: +49571 887-0 | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.